
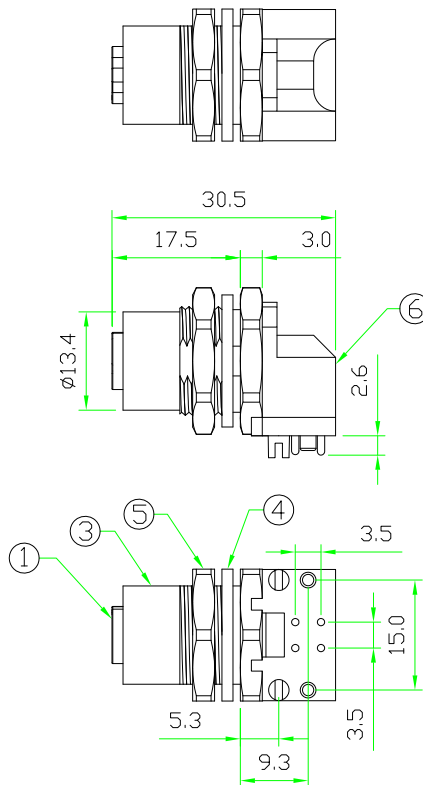

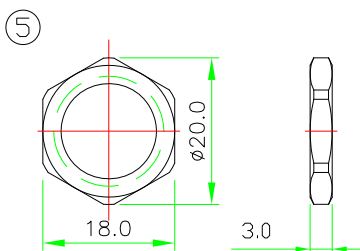


Recommended
Panel Cut-Out



REV.	DESCRIPTION	DATE
A	ISSUE	Mar/12/2011

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE



2. HOW TO ORDER: A12X-M2XXHPRR

03 - 3 PIN


04 - 4 PIN

05 - 5 PIN


D - CURRENT RATING 5A



A12D-M203HPPR



A12D-M204HPPR



A12D-M205HPPR

Pin Assignment Front View


6	HOLDER	NYLON+GF.	BLACK	1	127-135
5	HEX NUT	BRASS. NICKEL PLATED.		1	M12-P-NUT-R(A)
4	GASKET	EPDM.	BLACK	1	M12-G
3	HOUSING	BRASS, NICKEL PLATED,		1	M12F-RPH -KTA(A3)
2	CONTACT	Brass , 6 u" Gold plated .Female Contact.		N	M12F-1.0PPR12 M12F-1.0PPR34
1	CONNECTOR	M12 A-Coding Female connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE : M12 A-Coding FEMALE R/A PCB PIN REAR MOUNT HEX FLANGE PANEL CONNECTOR	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: A12D-M2xxHPRR	DR. <i>MICHAEL</i>
X ±0.25 XX ±0.1			CH. <i>NEK</i>
XXX ±0.05 ANGLE ±1°X		DWG.NO: A12D-M2xxHPRR	AP.
REV.	SHEET		
A	1/1		









DR. *MEKAL*

CH. *MEK*

AP.



Recommended
Panel Cut-Out

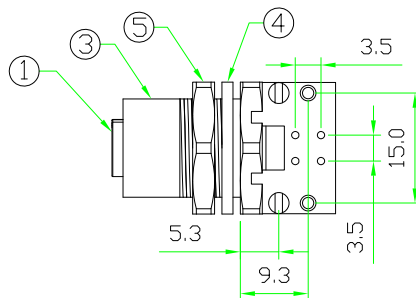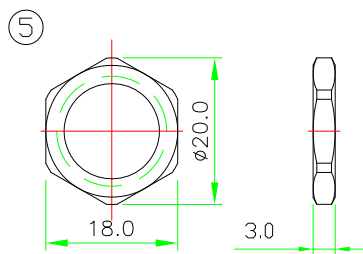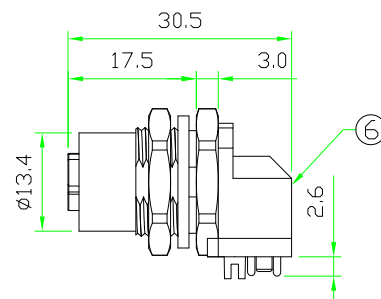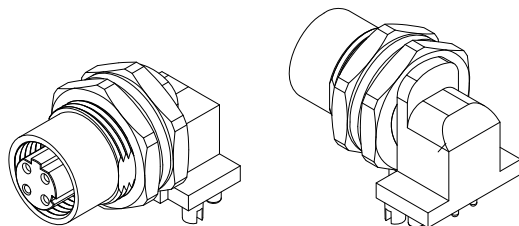

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. HOW TO ORDER: D12X-M2XXHPRR

03 - 3 PIN

04 - 4 PIN

05 - 5 PIN

D - CURRENT RATING 5A



D12D-M203HPRR D12D-M204HPRR D12D-M205HPRR

Pin Assignment Front View

6	HOLDER	NYLON+GF.	BLACK	1	127-135
5	HEX NUT	BRASS. NICKEL PLATED.		1	M12-P-NUT-R(A)
4	GASKET	EPDM.	BLACK	1	M12-G
3	HOUSING	BRASS, NICKEL PLATED,		1	M12F-RPH-KTA(A3)
2	CONTACT	Brass , 6 u" Gold plated .Female Contact.		N	M12F-1.0PPR12 M12F-1.0PPR34
1	CONNECTOR	M12 D-Coding Female connector insert.	BLACK	1	20-135-N5
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE : M12 D-Coding FEMALE R/A PCB PIN REAR MOUNT HEX FLANGE PANEL CONNECTOR	
	SCALE 1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X		P/N: D12D-M2xxHPRR	DR. <i>michael</i>
REV. A	SHEET 1/1		CH. <i>NEK</i>
		DWG.NO: D12D-M2xxHPRR	AP. <i>green</i>