








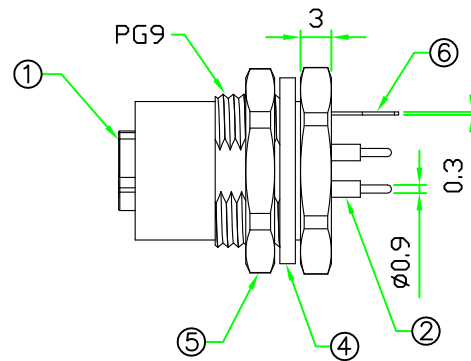


Recommended
Panel Cut-Off

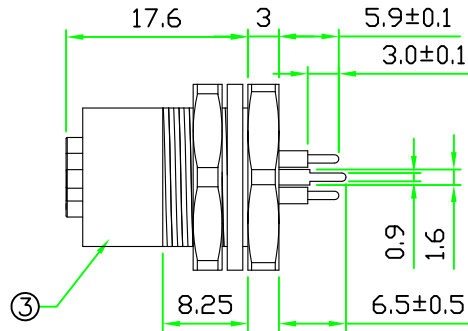

8	O-RING	VITON.	BLACK	1	M12-O-VK
7	GLUE	EPOXY.	BLACK	1	
6	SHIELD PIN	BRASS, NICKEL PLATED.		1	M12-SA-GP
5	HEX NUT	BRASS, NICKEL PLATED. PG9 THREAD.		1	M12-P-NUT-P9
4	GASKET	EPDM.	BLACK	1	M12-G-EP70
3	HOUSING	BRASS, NICKEL PLATED,		1	M12F-RPH-SL19-P9
2	CONTACT	BRASS, 6 u" Gold Plated .Female Contact.		4	M12F-1.0PPL24.4
1	CONNECTOR	M12 D-Coding 4 Pin Female Connector Insert.	BLACK	1	D12D-4FS (20-135-N5)
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Aug/16/2012



UNIT: mm

SCALE

1:1

UNLESS OTHERWISE
SPECIFIED TOLERANCES:

X ±0.25 XX ±0.1

XXX ±0.05, ANGLE ±1°X

REV.

SHEET

A

1/1

TITLE : M12 D-Coding 4P Female Connector
Rear Mount Hex Flange PCB Pin
with Shield Pin

P/N: D12D-S204HPR-P9

DWG.NO: D12D-S204HPR-P9

DR. *Jack*

CH. *NICK*

AP.