


RoHS
IP67

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/15/2010

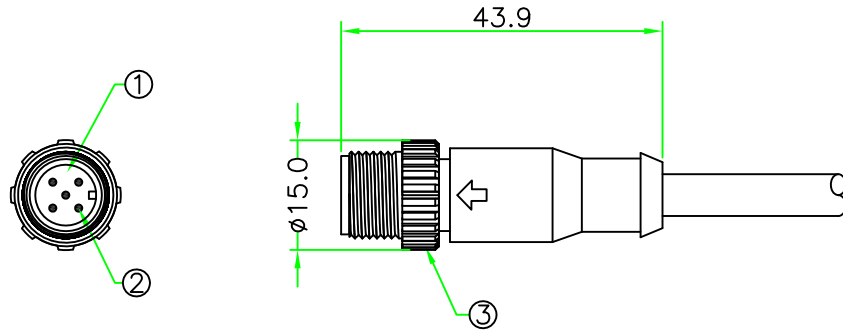


NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

2. HOW TO ORDER: A12X-P1XXSN

03 - 3 PIN 08 - 8 PIN
04 - 4 PIN 12 - 12 PIN
05 - 5 PIN
D - CURRENT RATING 5A
N - CURRENT RATING 2A

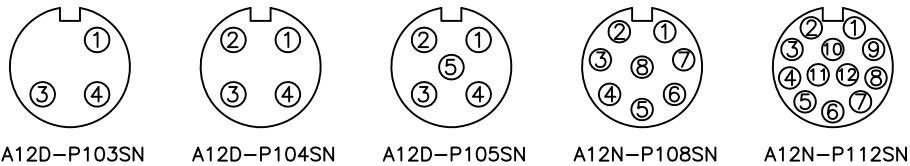


Pin Assignment Front View

3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold plated .		N	
1	CONNECTOR	M12 A-Coding Male connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS


		UNIT:mm	TITLE	
SCALE		1:1	M12 A-Coding MALE molded cable (PLASTIC)	
UNLESS OTHERWISE SPECIPEC TOLERANCES: x ±0.25 xx ± 0.1 xxx ± 0.05 ANGLE ± 1°X		P/N:		DR. Stanley
REV.		SHEET		CH. ERJC
A		1/1		AP.
		DWG.NO:		
		A12x-P1xxSN		

RoHS
IP67

REV.	DESCRIPTION	DATE
A	ISSUE	Feb/26/2009

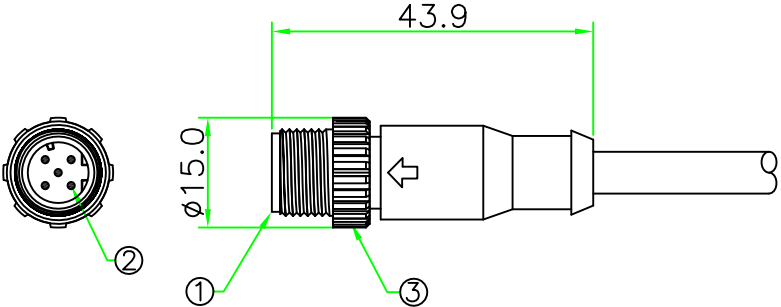

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: D12X-P1XXSN
- 03 - 3 PIN
 - 04 - 4 PIN
 - 05 - 5 PIN
 - D - CURRENT RATING 5A

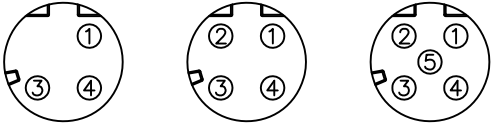

D12D-P103SN D12D-P104SN D12D-P105SN

Pin Assignment Front View

3	RING NUT	Nylon + GF.		1	
2	CONTACT	Brass , 6 u" Gold plated .		N	
1	CONNECTOR	M12 Male connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		UNIT:mm	TITLE M12 D-Coding MALE molded cable plastic ring nut		
SCALE		1:1	P/N: D12x-P1xxSN		
UNLESS OTHERWISE SPECIED TOLERANCES:					
X ± 0.25 XX ± 0.1			DWG.NO: D12x-P1xxSN		
XXX ± 0.05 ANGLE ± 1°					
REV.	A	SHEET 1/1	AP.		