




## M8 Series Specification

### M8 Series, Molded with Cable

Description	Molded with Cable, 180° Male Pin Screw Type,Solder	Molded with Cable, 180° Female Pin Screw Type,Solder
		

### Drawing

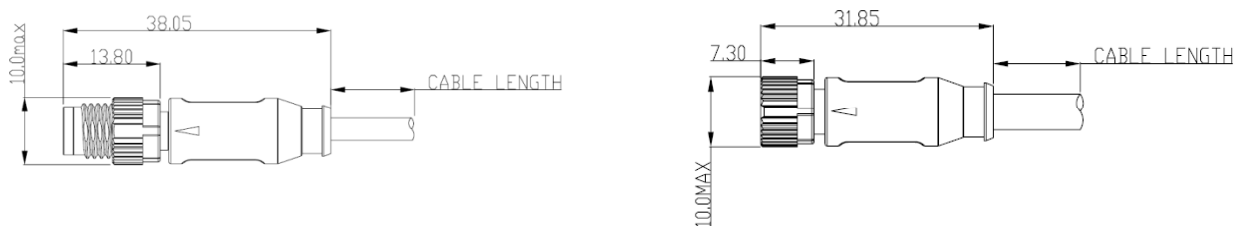

Part NO.	Contacts	Part -Number	Contacts	Part -Number
	3	52031103-01-XXXXX	3	52034103-01-XXXXX
	4	52041103-01-XXXXX	4	52044103-01-XXXXX

Specifications	
Number of Contacts	3
Wire Gauge	3X0.25mm <sup>2</sup> / 3x0.34mm <sup>2</sup>
Voltage Rating	60V DC
Rated Current(40°C)	max. 3 A
Signal per port	1
Environmental Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Operating Temperature	-20°C - 85°C, depending on cable quality