

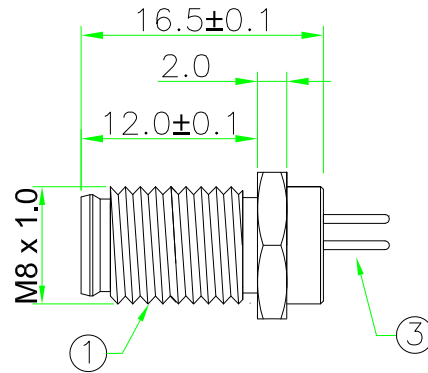


RECOMMENDED
PANEL CUT-OUT

RoHS

IP67



NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +90°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-M1XXCP




03 - 3 PIN 06 - 6 PIN

04 - 4 PIN

05 - 5 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A

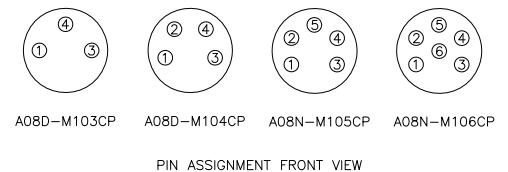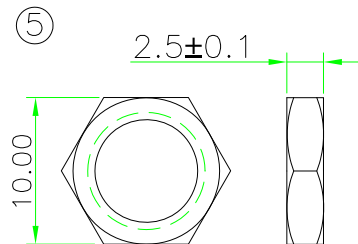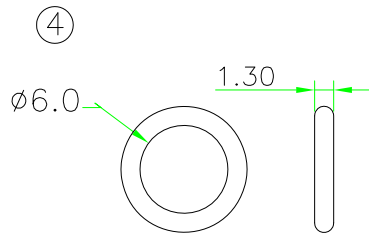

5	HEX NUT	BRASS, NICKEL PLATED.		1				
4	O-RING	SILICON, $\phi 6.0 \times 1.3\text{mm}$.	D. GREY	1			UNIT: mm	TITLE M8 A Code MALE Metal PCB Type Panel Mount Connector
3	PIN CONTACT	BRASS , Male PIN, GOLD PLATED 6u".		N		SCALE	2:1	
2	Connector Body	M8 Male connector insert, NYLON+GF.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES: X $\pm$ 0.1 XX $\pm$ 0.05 XXX $\pm$ 0.03 ANGLE $\pm$ 1°		P/N: A08x-M1xxCP
1	SHELL	BRASS, NICKEL PLATED.		1		REV.	SHEET	DR. JACK CH. Michael
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A2	1/1	DWG.NO: A08x-M1xxCP AP.