
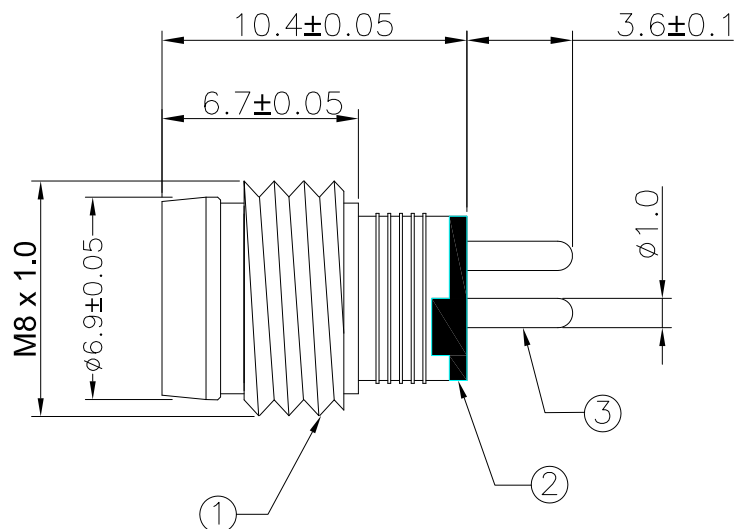


RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	11/29/2006
A1	Change pin design	11/30/2006
A2	Rivised pin Length	12/25/2006
A3	Change part number	10/17/2012



NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A

TEMPERATURE RANGE: -25°C TO +90°C

DIELECTRIC WITHSTANDING VOLTAGE:


500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-S1XXCP


03 - 3 PIN

04 - 4 PIN

D - CURRENT RATING 5A



A08D-S103CP



A08D-S104CP

PIN ASSIGNMENT FRONT VIEW

3	PIN CONTACT	BRASS , Male pin ,gold plated 6u".		N	
2	Plastic Insert	M8 connector insert, NYLON+GF.	BLACK	1	
1	SHELL	BRASS, NICKEL PLATED,		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE		
SCALE	4:1	M8 MALE PCB MOUNT CONNECTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: A08x-S1xxCP	DR. <i>jack</i>	
xxx ± 0.1 xx ± 0.05			CH. <i>мехаел</i>	
xxx ± 0.03 ANGLE ± 1°				
REV. A3	SHEET 1/1	DWG.NO: A08x-S1xxCP	AP.	