
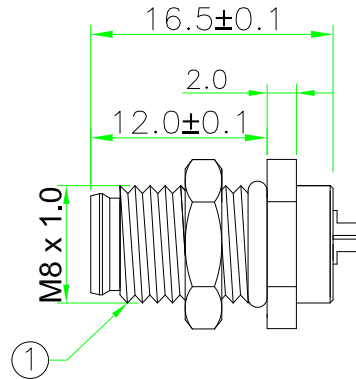


RECOMMENDED
PANEL CUT-OUT



NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A

TEMPERATURE RANGE: -25°C TO +90°C

DIELECTRIC WITHSTANDING VOLTAGE:




500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08D-P1XXCS

03 - 3 PIN

04 - 4 PIN

D - CURRENT RATING 5A

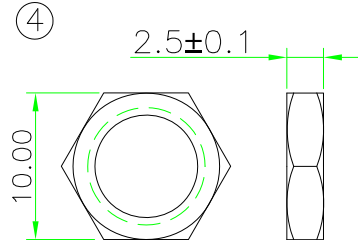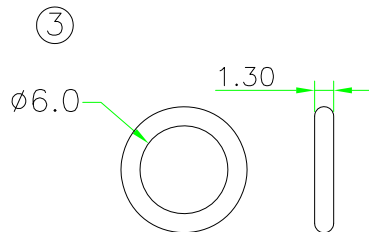

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	UNIT: mm	TITLE	P/N:	DR.
4	Hex Nut	Naylon + GF.	BLACK	1		SCALE	2:1	M8 MALE Plastic Solder Type Panel Mount Connector	<i>jack</i>
3	O-Ring	SILICON, $\phi 6.0 \times 1.3\text{mm}$.	BLACK	1		UNLESS OTHERWISE SPECIFIED TOLERANCES:		A08D-P1xxCS	<i>Michael</i>
2	Contact	BRASS , Male PIN, GOLD PLATED 6u".		N		X ± 0.1 XX ± 0.05			
1	Connector	Naylon + GF.	BLACK	1		XXX ± 0.03 ANGLE $\pm 1^\circ$			
						REV. A1	SHEET 1/1	DWG.NO: A08D-P1xxCS	AP.