

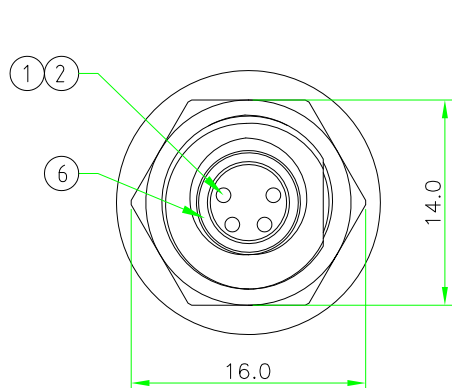


Scale : 2:1
Recommended
Panel Cut-Out

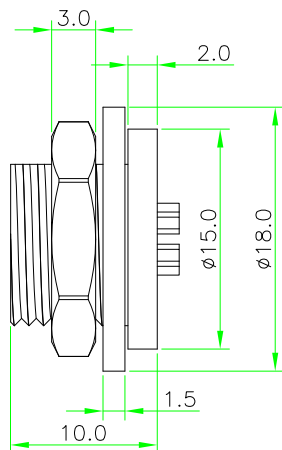

REV.	DESCRIPTION	DATE
A	ISSUE	Feb/18/2011
A1	Changing part number.	Oct/04/2012

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +90°C

DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-M2XXRPCS


02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN

04 - 4 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A

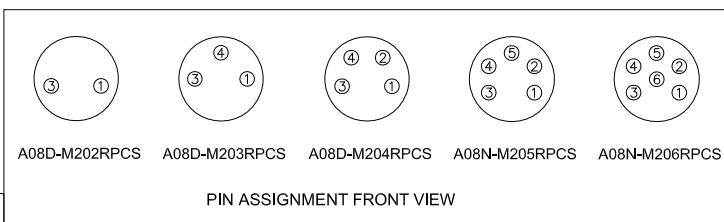

6	O-RING	VITON.	BLACK	1	
5	HEX NUT	BRASS, NICKEL PLATED.		1	
4	GASKET	SANTOPRENE.	BLACK	1	
3	HOUSING	BRASS, NICKEL PLATED.		1	
2	CONTACT	BRASS , Male pin ,gold plated 6u".		N	
1	CONNECTOR	M8 connector insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE	
SCALE	2:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.1 XX ± 0.05 XXX ± 0.03 ANGLE ± 1°		P/N: A08x-M2xxRPCS	DR. Stanley
REV. A1	SHEET 1/1	DWG.NO: A08x-M2xxRPCS	CH. MJEHAE
			AP.