

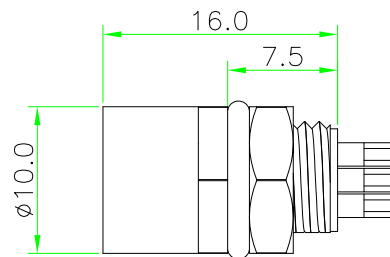



RECOMMENDED
PANEL CUT-OUT

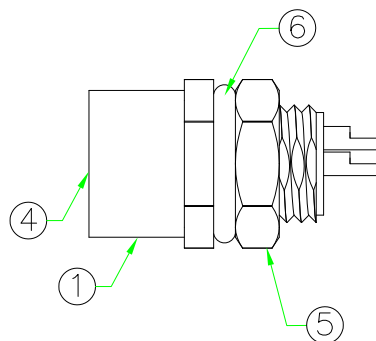

RoHS

IP67



NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +90°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-M2XXCSF




02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN


04 - 4 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A

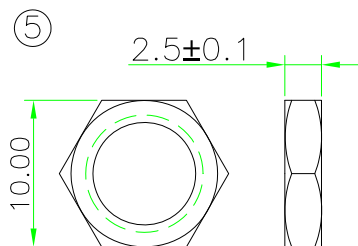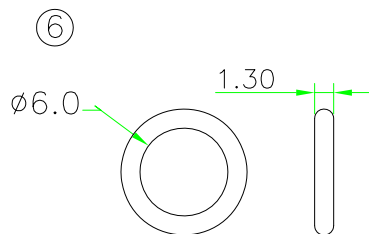


A08D-M202CSF



A08D-M203CSF



A08N-M204CSF



A08N-M205CSF



A08N-M206CSF

PIN ASSIGNMENT FRONT VIEW

6	O-RING	VITON.	BLACK	1	
5	HEX NUT	BRASS, NICKEL PLATED.		1	
4	O-RING	SILICON, $\phi 6.0 \times 1.3\text{mm}$.	D. GREY	1	
3	CONTACT	BRASS , Female PIN, GOLD PLATED 6u".		N	
2	INSERT	M8 Female connector insert, NYLON+GF.	BLACK	1	
1	SHELL	BRASS, NICKEL PLATED.		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE M8 A Code MALE Metal Solder Bucket Rear Mount Connector	
SCALE	2:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N: A08x-M2xxCSF	DR. <i>Jack</i>
X ± 0.1 XX ± 0.05			CH. <i>Michael</i>
xxx ± 0.03 ANGLE ± 1°		DWG.NO: A08x-M2xxCSF	AP.
REV. A1	SHEET 1/1		