


RoHS

IP67

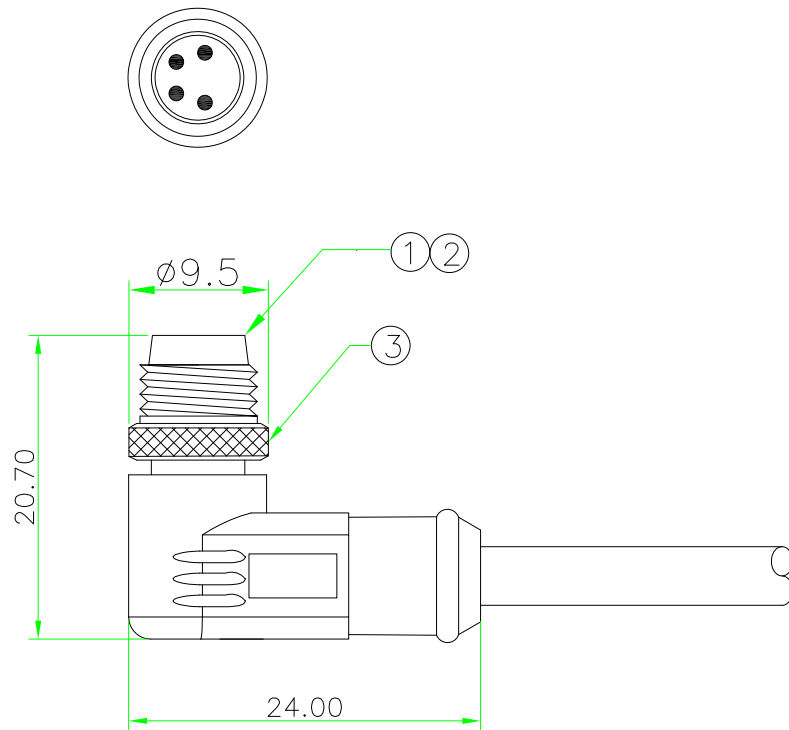

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Changing part number.	Oct/04/2012

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-M1XXRN


02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN

04 - 4 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A



A08D-M102RN A08D-M103RN A08D-M104RN A08N-M105RN A08N-M106RN

PIN ASSIGNMENT FRONT VIEW

3	RING NUT	BRASS, NICKEL PLATED.		1	
2	Contact	Brass , 6 u" Gold plated . Male Contact.		N	
1	Connector	M8 Male connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		UNIT: mm	TITLE : M8 A Code		
SCALE		2:1	Male R/A molded cable Ass'y		
UNLESS OTHERWISE SPECIFIED TOLERANCES:			P/N: A08x-M1xxRN	DR. <i>jaek</i>	
X ± 0.25 XX ± 0.1 xxx ± 0.05 ANGLE ± 1°X				CH. <i>Michael</i>	
REV. A1		SHEET 1/1	DWG.NO: A08x-M1xxRN	AP.	