


REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Change part number.	Oct/17/2012

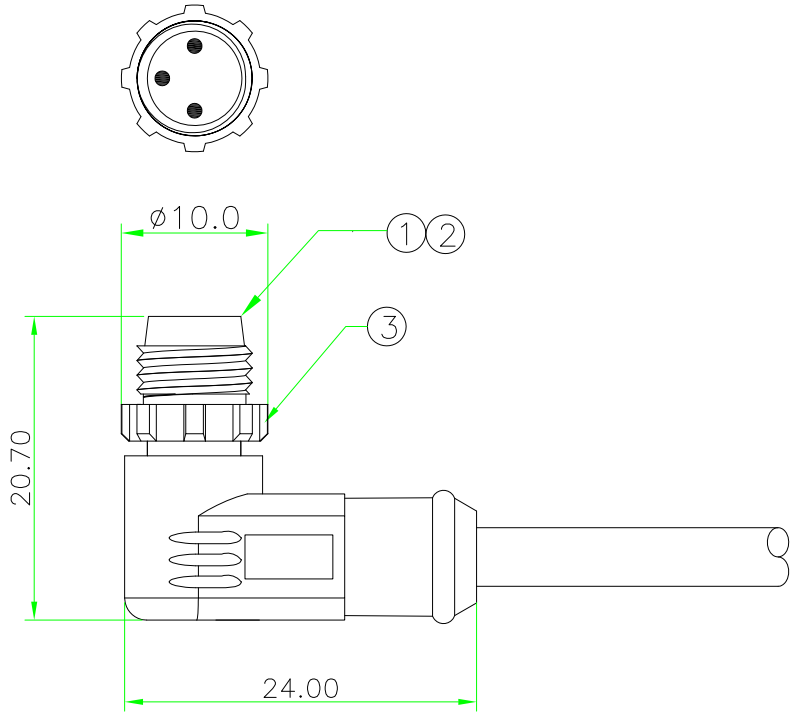


NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-P1XXRN

02 - 2 PIN 05 - 5 PIN
03 - 3 PIN 06 - 6 PIN
04 - 4 PIN

N - CURRENT RATING 2A
D - CURRENT RATING 5A

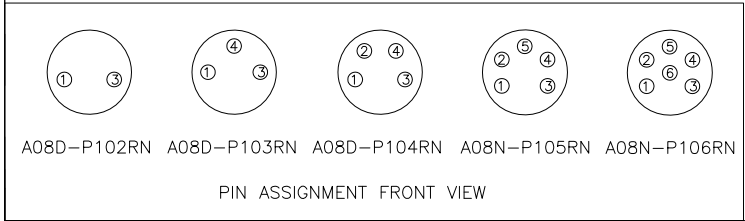

3	RING NUT	Naylon + GF.		1	
2	Contact	Brass , 6 u" Gold plated . Male Contact.		N	
1	Connector	M8 Male connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		UNIT: mm	TITLE : M8 Male R/A molded cable Ass'y Plastic Screw Nut	
SCALE		2:1	P/N: A08x-P1xxRN	DR. <i>jaek</i>
UNLESS OTHERWISE SPECIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X				CH. <i>Michael</i>
REV. A1	SHEET 1/1	DWG.NO: A08x-P1xxRN	AP.	