


RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Changing part number.	Oct/04/2012

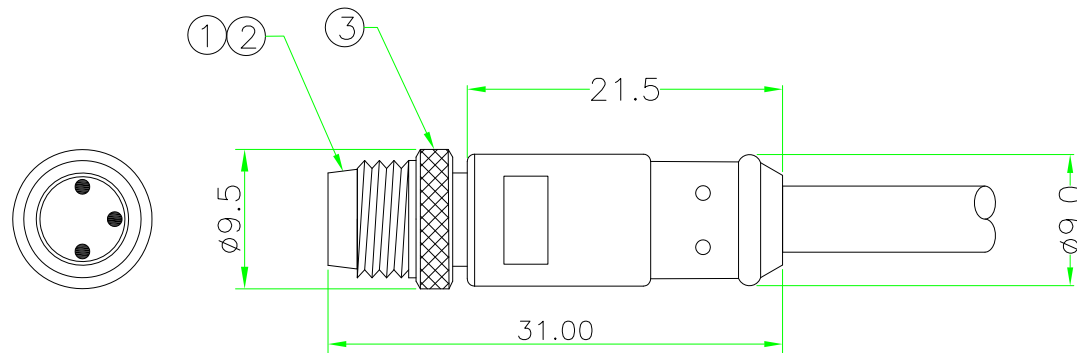

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-M1XXSN


02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN

04 - 4 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A



A08D-M102SN A08D-M103SN A08D-M104SN A08N-M105SN A08N-M106SN

PIN ASSIGNMENT FRONT VIEW

3	RING NUT	BRASS, NICKEL PLATED.		1	
2	Contact	Brass , 6 u" Gold plated .Male Contact.		N	
1	Connector	M8 Male connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS


	UNIT: mm	TITLE :	M8 A Code
SCALE	2:1		Male molded cable Ass'y
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X		P/N:	A08x-M1xxSN
REV.	SHEET	DWG.NO:	A08x-M1xxSN
A1	1/1		

DR. *jaek*
CH. *Michael*
AP.

RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Change part number.	Oct/17/2012

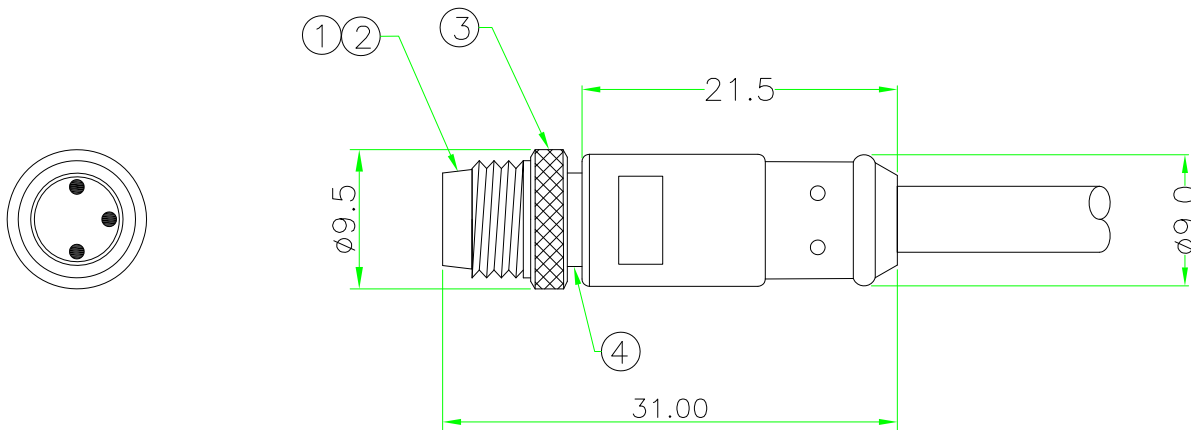

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A

TEMPERATURE RANGE: -25°C TO +90°C

DIELECTRIC WITHSTANDING VOLTAGE:


500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-S1XXSN

03 - 3 PIN

04 - 4 PIN

D - CURRENT RATING 5A



A08D-S103SN A08D-S104SN

PIN ASSIGNMENT FRONT VIEW

4	METAL SHELL	BRASS, NICKEL PLATED.		1			UNIT: mm	TITLE : M8 Male molded cable Ass'y With Shield Function	
3	RING NUT	BRASS, NICKEL PLATED.		1		SCALE	2:1		
2	Contact	Brass , 6 u" Gold plated .Male Contact.		N		UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X		P/N: A08x-S1xxSN	DR. Stanley
1	Connector	M8 Male connector insert.	BLACK	1					CH. Michael
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV. A1	SHEET 1/1	DWG.NO: A08x-S1xxSN	AP.