


RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Change part number.	Oct/17/2012

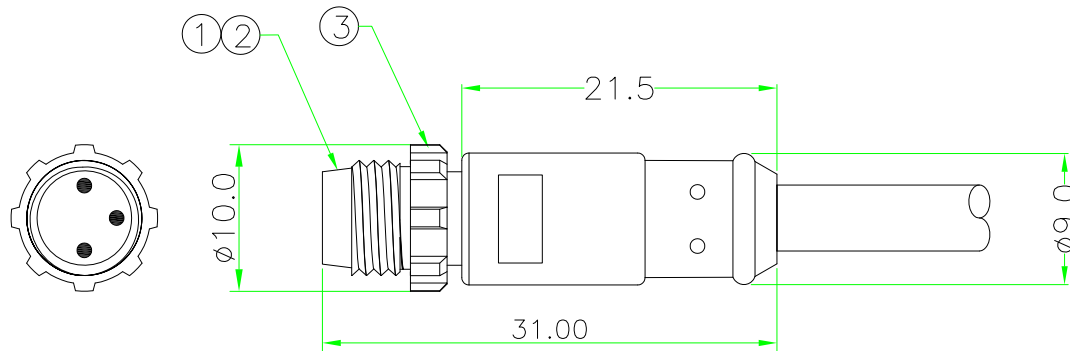

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-P1XXSN


02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN

04 - 4 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A



A08D-P102SN A08D-P103SN A08D-P104SN A08N-P105SN A08N-P106SN

PIN ASSIGNMENT FRONT VIEW

3	RING NUT	Nylon + GF.		1	
2	Contact	Brass , 6 u" Gold plated .Male Contact.		N	
1	Connector	M8 Male connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		UNIT: mm	TITLE : M8 Male molded cable Ass'y plastic screw nut	
SCALE		2:1		
UNLESS OTHERWISE SPECIED TOLERANCES:			P/N: A08x-P1xxSN	DR. <i>jaek</i>
X ± 0.25 XX ± 0.1				CH. <i>Michael</i>
xxx ± 0.05 ANGLE ± 1°X			DWG.NO: A08x-P1xxSN	AP.
REV.	SHEET			
S	A1	1/1		