


RoHS

IP65

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Changing part number.	Oct/04/2012

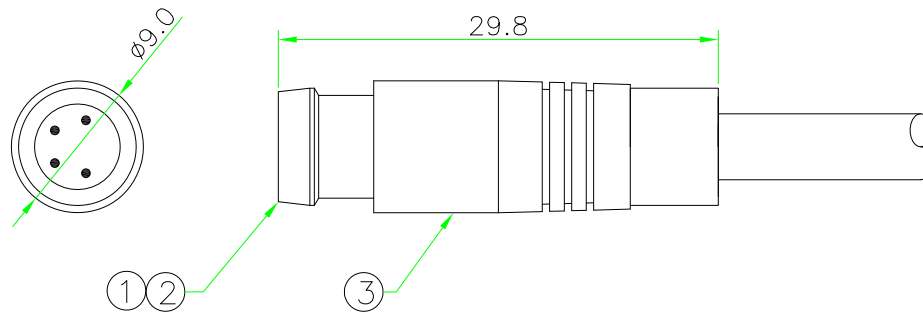

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-N1XXSN


02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN

04 - 4 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A



A08D-N102SN A08D-N103SN A08D-N104SN A08N-N105SN A08N-N106SN

PIN ASSIGNMENT FRONT VIEW

3	Over mold	PU or PVC.	BLACK	1	
2	Contact	Brass , 6 u" Gold plated .Male Contact.		N	
1	Connector	M8 Male connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

		UNIT: mm	TITLE : M8 A Code Male Snap Type molded cable Ass'y	
SCALE		2:1	P/N: A08x-N1xxSN	
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X		SHEET 1/1		DR. <i>jaek</i>
REV. A1		DWG.NO: A08x-N1xxSN		CH. <i>Michael</i>
				AP.