


RoHS

IP67

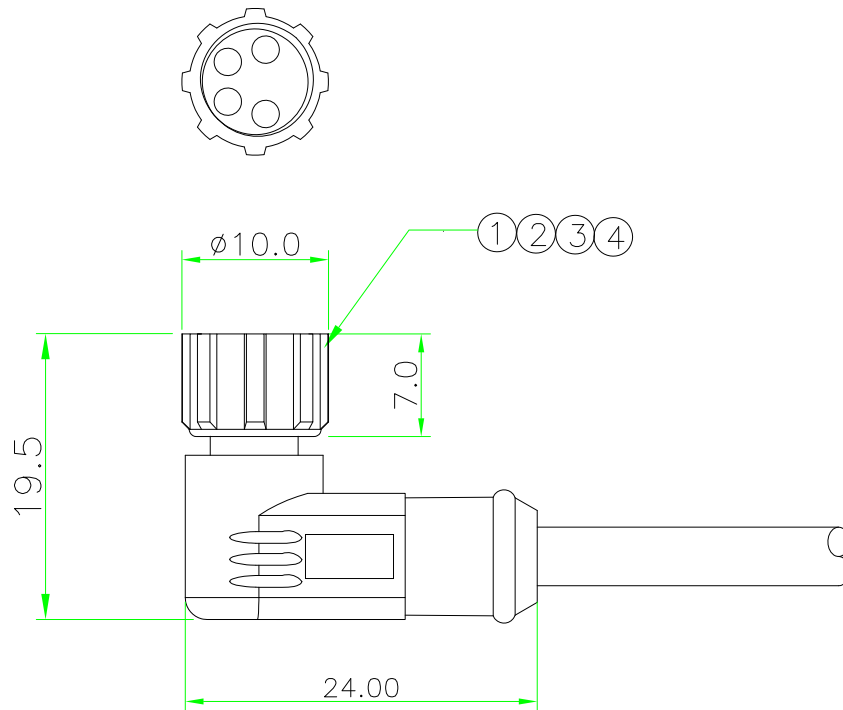

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Change part number.	Oct/17/2012

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-P2XXRN

02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN

04 - 4 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A



A08D-P202RN



A08D-P203RN



A08D-P204RN



A08N-P205RN



A08N-P206RN

PIN ASSIGNMENT FRONT VIEW

4	RING NUT	Naylon+GF.		1	
3	O-RING	VITON.	BLACK	1	
2	Contact	Brass , 6 u" Gold plated .Female Contact.		N	
1	Connector	M8 Female connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT:mm	TITLE : M8 Female R/A molded cable Ass'y Plastic Ring NUT		
SCALE	2:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°X		P/N: A08x-P2xxRN	DR. <i>jaek</i>	
REV.	SHEET		CH. <i>Michael</i>	
A1	1/1	DWG.NO: A08x-P2xxRN	AP.	