


RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2011
A1	Change part number.	Oct/17/2011

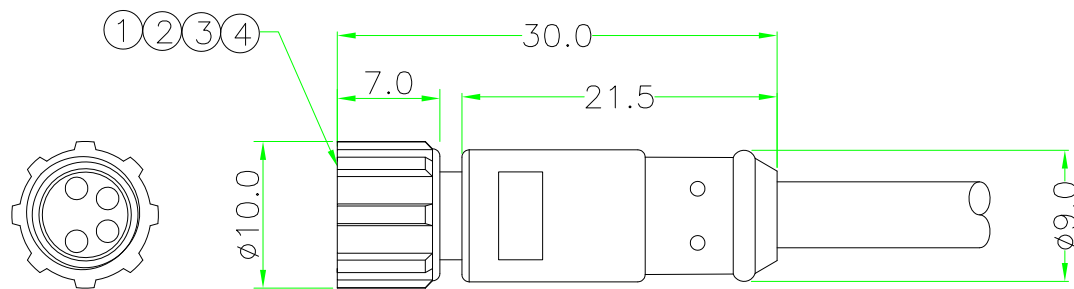

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A08X-P2XXSN


02 - 2 PIN 05 - 5 PIN

03 - 3 PIN 06 - 6 PIN

04 - 4 PIN

N - CURRENT RATING 2A

D - CURRENT RATING 5A



A08D-P202SN A08D-P203SN A08D-P204SN A08N-P205SN A08N-P206SN

PIN ASSIGNMENT FRONT VIEW

4	RING NUT	Nylon + GF.	BLACK	1			UNIT: mm	TITLE : M8 Female molded cable Ass'y plastic screw nut.	
3	O-RING	VITON	BLACK	1		SCALE	2:1		
2	Contact	Brass , 6 u" Gold plated .Female Contact.		N		UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1° X		P/N: A08x-P2xxSN	DR. <i>jaek</i>
1	Connector	M8 Female connector insert.	BLACK	1					CH. <i>Michael</i>
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV. A1	SHEET 1/1	DWG.NO: A08x-P2xxSN	AP.