



RoHS

IP65

REV.	DESCRIPTION	DATE
A	ISSUE	July/01/2008
A1	Change part number.	Oct/17/2012

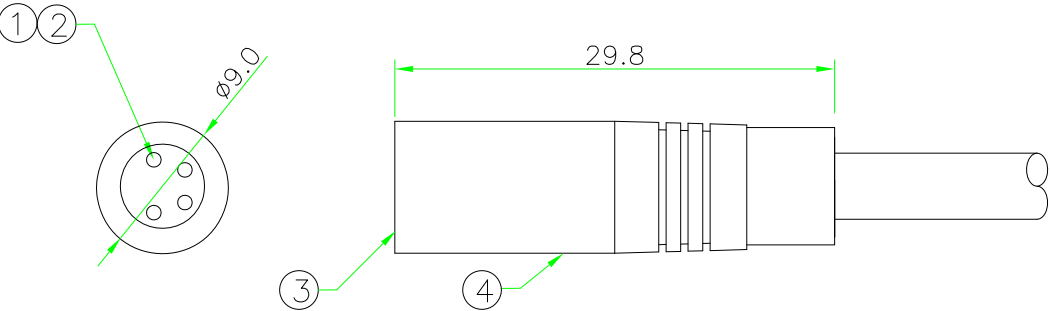

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
TEMPERATURE RANGE: -25°C TO +90°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A08X-N2XXSN
- 02 - 2 PIN 05 - 5 PIN
 - 03 - 3 PIN 06 - 6 PIN
 - 04 - 4 PIN
 - N - CURRENT RATING 2A
 - D - CURRENT RATING 5A

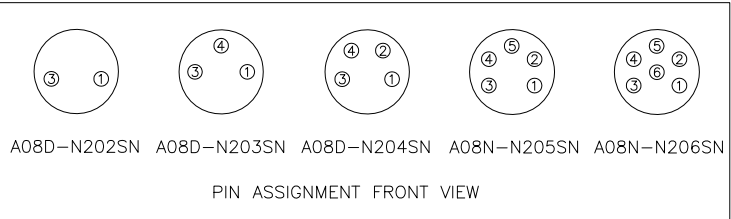

4	OVER MOLD	PU or PVC.	BLACK	1	
3	O-RING	VITON	BLACK	1	
2	Contact	Brass , 6 u" Gold plated .Female Contact.		N	
1	Connector	M8 Female connector insert.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE : M8 Female Snap Type molded cable Ass'y	
SCALE	2:1		
UNLESS OTHERWISE SPECIED TOLERANCES: X ± 0.25 XX ± 0.1 XXX ± 0.05 ANGLE ± 1°		P/N: A08x-N2xxSN	DR. <i>jaek</i>
REV.	SHEET		CH. <i>Michael</i>
A1	1/1	DWG.NO: A08x-N2xxSN	AP.