

Waterproof Connector USB A

Specifications

Cable Molding Connector

Connector

Gasket

Hex Nut

Nylon+GF.

EPDM

Nylon+GF.

Electrical Specifications

Voltage

Current

Contact resistance

600V

See below table

$\leq 5 \text{ m}\Omega$

Optional

Waterproof Cap

Nylon+GF

Environmental Specification


Temperature Rating

Protection


$-40^{\circ}\text{C}/+85^{\circ}\text{C}$

IP66, IP67, IP68


Female Panel Lock

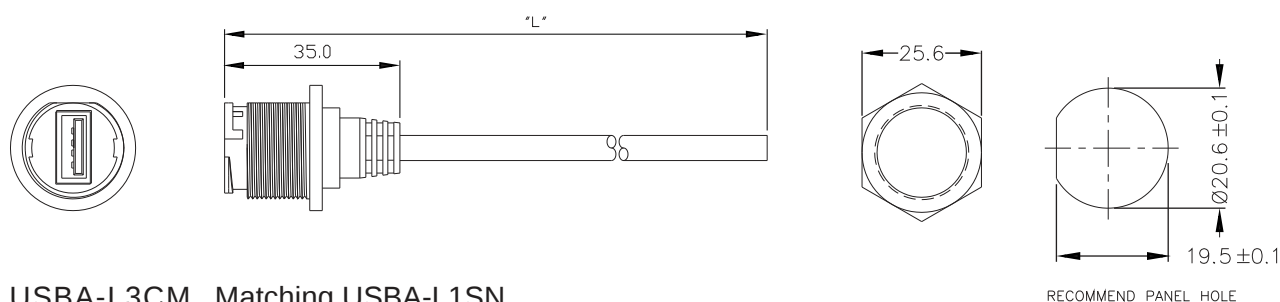

Male Lock Type

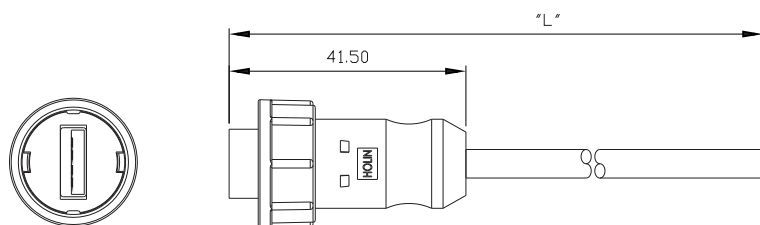

Male Screw Type

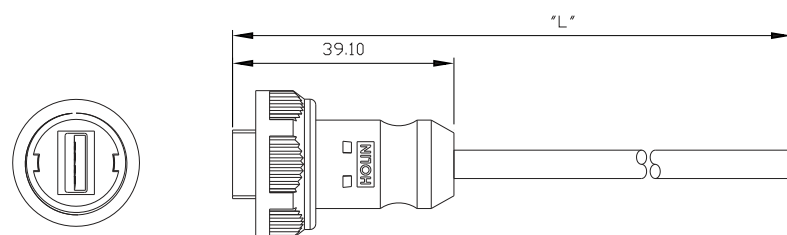

Waterproof Connector USB A

Specifications

Panel Mount

Contacts	Brass, 6u" gold Plating
Panel Body	Nylon+GF.
Gasket	EPDM
Hex Nut	Nylon+GF.

Optional

Dust Cap	Nylon+GF, RoHS
----------	----------------


Electrical Specifications

Voltage	600V
Current	See below table
Contact resistance	$\leq 5 \text{ m}\Omega$

Environmental Specification


Temperature Rating	-40°C/+85°C
Protection	IP66, IP67, IP68

Female Panel Lock

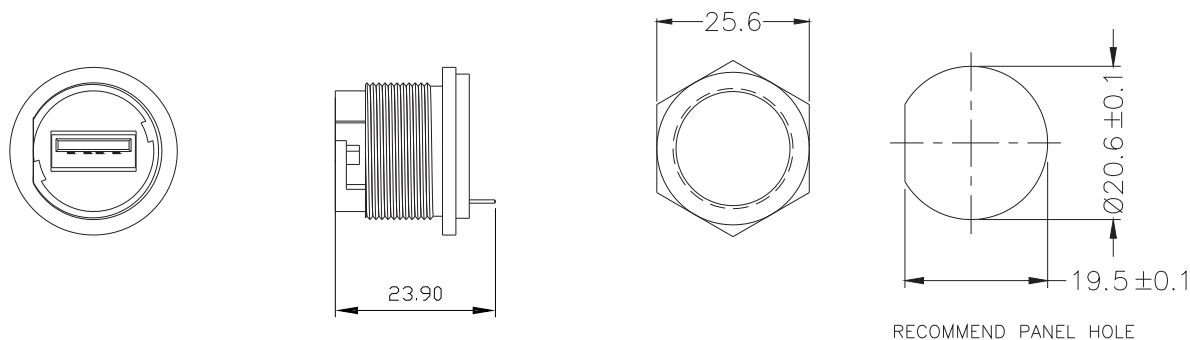

USBAC-L3CPS Matching USBA-L1SN,

Female Panel Screwing

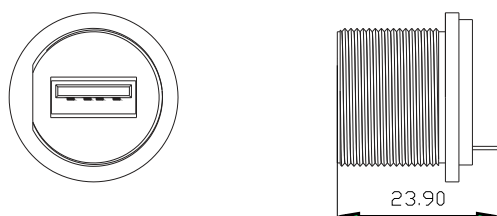

USBAC-P3CPS Matching USBA-P1SN